

QRJ1-8000-22

Single Channel, DC~8GHz, 22mm

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	DC~8GHz
VSWR:	1.3 max.
VSWR Flatness:	0.1 max.
Insertion Loss:	0.3dB max.
Insertion Loss Flatness:	0.1dB max.
Average Power:	200W max.@DC~2GHz 100W max.@2~8GHz
Impedance:	50Ω


Mechanical

Connectors:	N female
Rotating Speed:	100RPM
Operation Life:	5M Cycles
IP Grade:	IP51

Environmental

Operating Temperature:	-30~+80°C
Operating Humidity:	0~85%

Outline Drawings

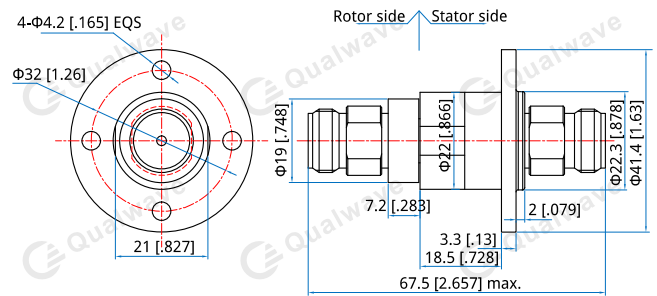

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QRJ1-8000-22

Customization is available upon request.