

QRJ4-4000-42

Channel 4, DC~4GHz, 42mm

Features:

- * Low VSWR
- * Low VSWR Flatness
- * Low Insertion Loss Flatness

Applications:

- * High Speed Digital Signal Transmission
- * Analog Signal Transmission

Electrical

Frequency:	DC~4GHz
VSWR:	1.5 max.
VSWR Flatness:	0.1 max.
Insertion Loss:	1dB max.
Isolation:	55dB min.
Input Power:	10W min.
IP Grade:	IP 67

Mechanical

Connectors:	SMA female
Rotating Speed:	60RPM max.
Torque:	0.3Nm max.
Operation Life:	5M Cycles min.

Environmental


Operating Temperature:	-55~+85°C
------------------------	-----------

How To Order

QRJ4-4000-42

Customization is available upon request.

Outline Drawings

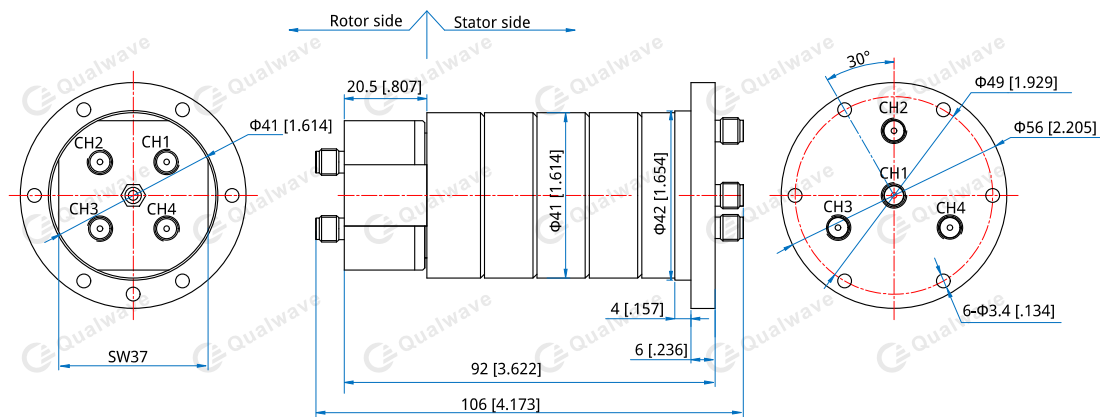

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]