

QSDC-10-500-50-30-NS

10~500MHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	10~500MHz
Insertion Loss:	0.7dB max.
Coupling:	30±1dB
Directivity:	20dB
VSWR(Mainline):	1.3 max.
Average Power:	50W

Mechanical

Size ^{*1} :	50.8*50.8*22.35mm 2*2*0.88in
Connectors:	N Female, SMA Female
Mounting:	2-Φ3.2mm through hole

[1] Exclude connectors and terminations.

Outline Drawings

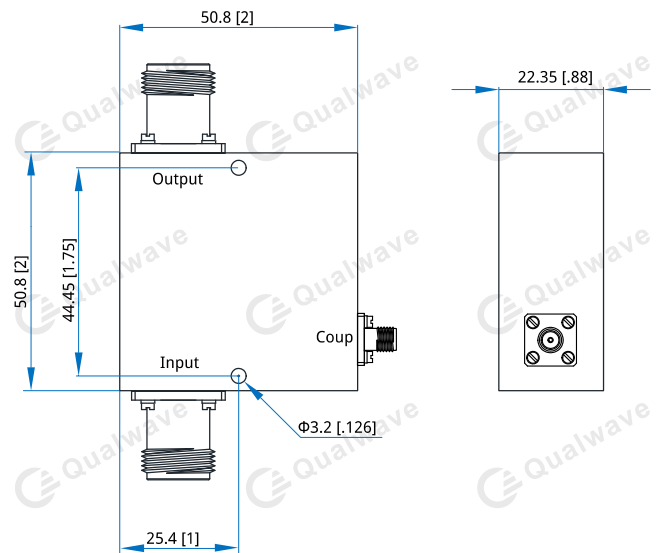

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-10-500-50-30-NS

Customization is available upon request.