

# QSDC-100-600-K2-40-N

## 0.1~0.6GHz, 200W

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	0.1~0.6GHz
Insertion Loss:	0.3dB max.
Coupling:	40±1dB max.
Coupling Flatness:	±1dB
Directivity:	18dB min.
VSWR (Mainline):	1.3 max.
Power (Mainline):	200W max.
Impedance:	50Ω

**Mechanical**

Size*1:	73*50*26mm 2.874*1.969*1.024in
Connectors:	N Female

[1] Exclude connectors.

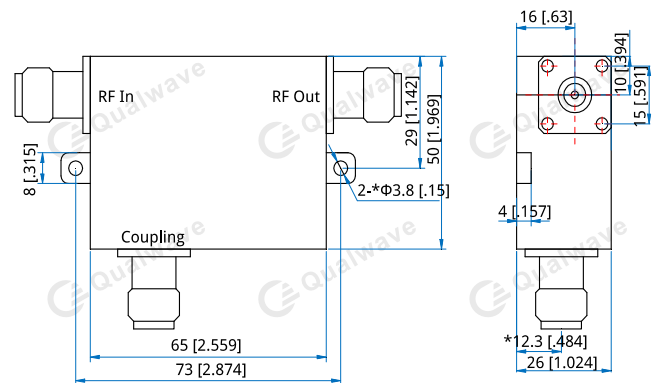
**Environmental**

Temperature:	-55~+85°C
--------------	-----------

**How To Order**

**QSDC-100-600-K2-40-N**

Customization is available upon request.

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

\*Ensure dimensions for design.