

QSDC-1000-26500-30-20-S

1~26.5GHz, 30W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1~26.5GHz
Insertion Loss:	2.2dB max.
Coupling:	20±1.5dB
Directivity:	10dB min.
VSWR:	1.7 max.
Average Power:	30W
Impedance:	50Ω

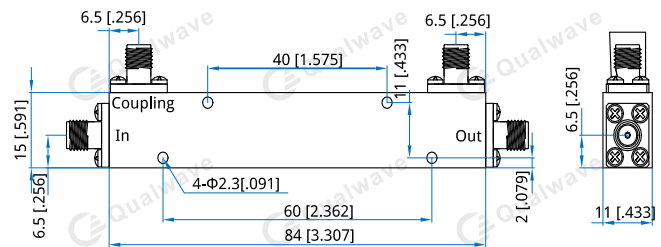
Mechanical

Size ^{*1} :	84*15*11mm 3.307*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Environmental

Operating Temperature: -45~+85°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-1000-26500-30-20-S

Customization is available upon request.