

## QSDC-12000-13000-10-6-S

12~13GHz, 10W, 6dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	12~13GHz
Insertion Loss:	0.8dB max.
Coupling:	6±1dB
Coupling Flatness:	±1dB max.
Directivity:	12dB min.
VSWR:	1.5 max.
Average Power:	10W max.

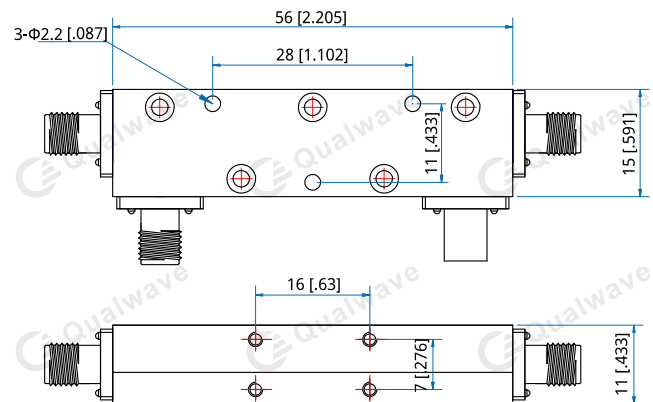
**Mechanical**

Size <sup>*1</sup> :	56*15*11mm 2.205*0.591*0.433in
Connectors:	SMA Female
Mounting:	3-Φ2.2mm through-hole

[1] Exclude connectors and terminations.

**Environmental**

Temperature:	-40~+80°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QSDC-12000-13000-10-6-S**

Customization is available upon request.