

## QSDC-200-2000-50-30-S

0.2~2GHz, 50W, 30dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**


---

Frequency:	0.2~2GHz
Insertion Loss:	0.8dB max.
Coupling:	30±1.5dB
Coupling Flatness:	±1.5dB max.
Directivity:	15dB min.
VSWR:	1.3 max.
Average Power:	50W max.

**Mechanical**


---

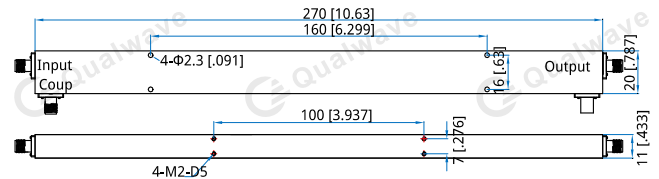
Size <sup>*1</sup> :	270*20*11mm 10.630*0.787*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

**Environmental**


---

Temperature:	-45~+85°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

[QSDC-200-2000-50-30-S](#)

Customization is available upon request.