

QSDC-2000-2500-K5-40-NS

2~2.5GHz, 500W, 40dB

Features:
 * Broadband
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency:	2~2.5GHz
Insertion Loss:	0.4dB max.
Coupling:	40±2dB
Coupling Flatness:	±0.3dB
Directivity:	15dB min.
VSWR:	1.4 max.
Average Power:	500W
Impedance:	50Ω

Mechanical


Size ^{*1} :	44*26*22mm 1.732*1.024*0.866in
Connectors:	N Female, SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

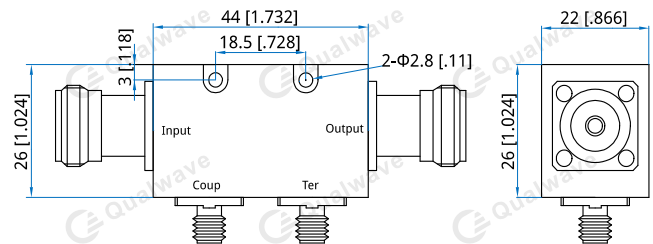

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-2000-2500-K5-40-NS

Customization is available upon request.