

QSDC-2000-6000-K25-40-NS

2~6GHz, 250W, 40dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

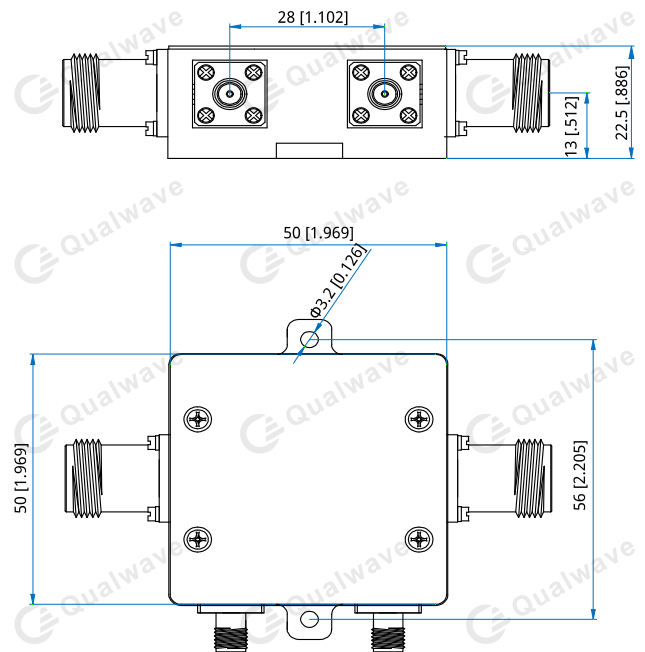
Electrical

Frequency:	2~6GHz
Insertion Loss:	0.6dB max.
Coupling:	40±2dB
Directivity:	11.5dB
VSWR:	1.3 max.
Power:	250W CW

Mechanical

Size ^{*1} :	50*50*22.5mm 1.969*1.969*1.886in
Connectors:	N Female, SMA Female
Mounting:	2-Φ3.2mm through hole

[1] Exclude connectors and terminations.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-2000-6000-K25-40-NS

Customization is available upon request.