

QSDC-300-4000-50-30-S

0.3~4GHz, 50W, 30dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

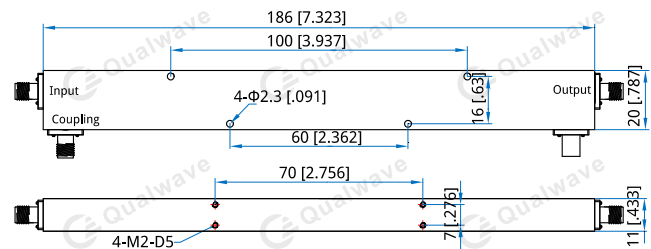
Electrical

Frequency:	0.3~4GHz
Insertion Loss:	1dB max.
Coupling:	30±1.5dB
Directivity:	12dB min.
VSWR:	1.4 max.
Average Power:	50W
Impedance:	50Ω

Mechanical

Size ^{*1} :	186*20*11mm 7.323*0.787*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole 4-M2, depth 5mm

[1] Exclude connectors and terminations.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

[QSDC-300-4000-50-30-S](#)

Customization is available upon request.