

## QSDC-300-800-50-30-S

0.3~0.8GHz, 50W, 30dB

**Features:**

- \* Broadband
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	0.3~0.8GHz
Insertion Loss:	0.3dB max.
VSWR:	1.2 max.
Directivity:	10dB min.
Coupling:	30±1dB
Impedance:	50Ω
Average Power:	50W

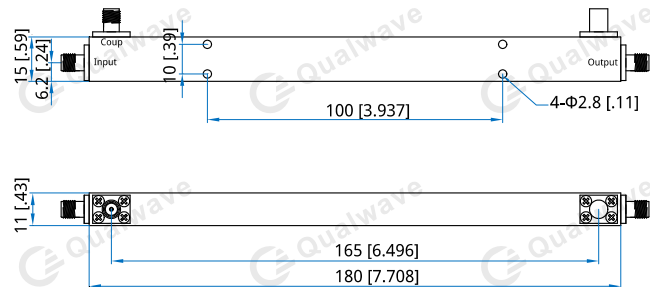
**Mechanical**

Size <sup>*1</sup> :	180*15*11mm 7.708*0.59*0.43in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

**Environmental**

Temperature:	-35~+75°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

**How To Order**

**QSDC-300-800-50-30-S**

Customization is available upon request.