

QSDC-400-3000-K3-50-S

0.4~3GHz, 300W, 50dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.4~3GHz
Insertion Loss:	0.5dB max.
Coupling:	50±2.5dB
Coupling Flatness:	±1.5dB max.
Directivity:	20dB min.
VSWR:	1.2 max.
Average Power:	300W
Impedance:	50Ω

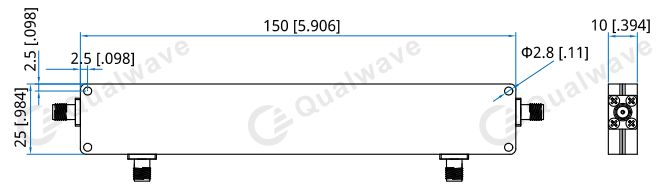
Mechanical

Size ^{*1} :	150*25*10mm 5.906*0.984*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-55~+95°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

[QSDC-400-3000-K3-50-S](#)

Customization is available upon request.