

QSDC-500-12000-80-20-S

0.5~12GHz, 80W, 20dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.5~12GHz
Insertion Loss:	1dB max.
VSWR:	1.6 max.
Directivity:	12dB min.
Coupling:	20±1dB
Coupling Flatness:	±1dB max.
Impedance:	50Ω
Average Power:	80W max.

Mechanical

Size ^{*1} :	113*15*11mm 4.449*0.591*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors and terminations.

Outline Drawings

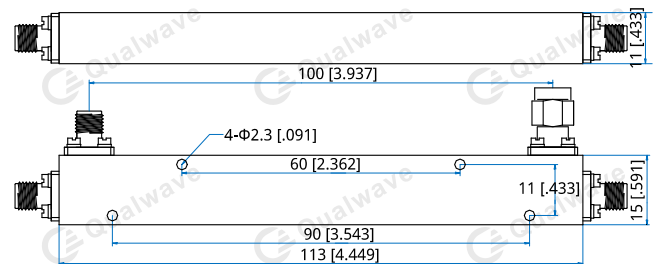

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QSDC-500-12000-80-20-S

Customization is available upon request.