

QSDC-800-3500-K2-40-N

0.8~3.5GHz, 200W, 40dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.8~3.5GHz
Insertion Loss:	0.35dB max.
Coupling:	40±1.5dB max.
Coupling Flatness:	±1.2dB
Directivity:	18dB min.
VSWR(Mainline):	1.4 max.
Average Power:	200W max.

Mechanical


Size ^{*2} :	50*50*26mm 1.969*1.969*1.024in
Connectors:	N Female
Mounting:	2-Φ3.8mm through-hole

[2] Exclude connectors and terminations.

Environmental

Operating Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

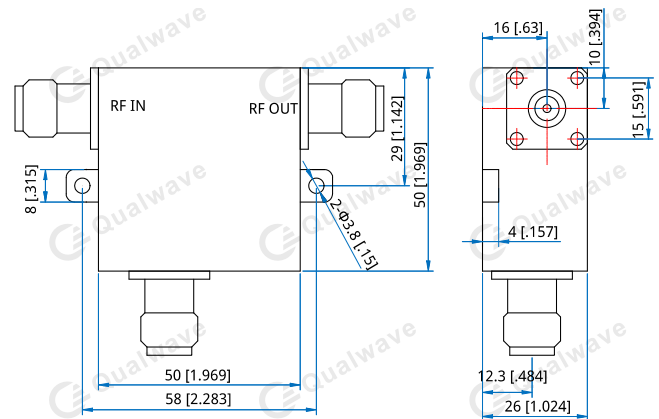

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QSDC-800-3500-K2-40-N

Customization is available upon request.