

# QPS3-26000-40000-A

## SP3T, 26~40GHz, Absorptive

**Features:**

- \* Low Insertion Loss
- \* High Isolation

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	26~40GHz
Insertion Loss:	5dB max.
Isolation:	60dB min.
VSWR:	2 max.
Input Power:	23dBm max.
Voltage/Current:	+5V@120mA max. -5V@50mA max.
Control:	TTL High - 1 TTL Low/NC - 0
Impedance:	50Ω

**Mechanical**


Size <sup>*1</sup> :	24*20*12mm 0.945*0.787*0.472in
Switching Time:	50nS max.
RF Connectors:	2.92mm Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Gold plated aluminum or Nickel plated aluminum
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

**Environmental**

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

**Outline Drawings**

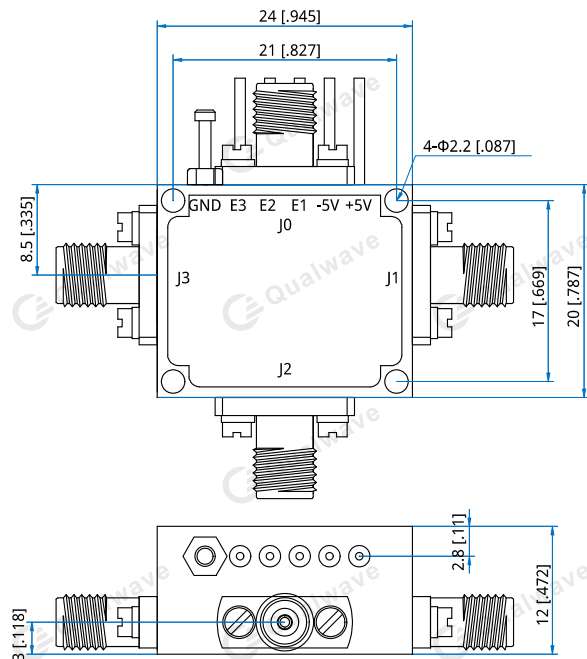

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

**Control True Table**

E1	E2	E3	Connection
0	1	1	J0 - J1 On
1	0	1	J0 - J2 On
1	1	0	J0 - J3 On

**How To Order**

**QPS3-26000-40000-A**

Customization is available upon request.