

QRHA430

1.7~2.6GHz, WR-430

Features:
* Broadband

Applications:
* Wireless
* Transceiver
* Laboratory Test
* Broadcast

Electrical

Frequency: 1.7~2.6GHz
Gain: 10dB min.
VSWR: 1.7 max.
Power: 100W min.
Beam Width: 20° min.


Mechanical

Interface: WR-430 (BJ22)
Material: Aluminium
Finish: Conductive oxidation
Coating: Black paint

Environmental

Temperature: -55~+165°C

Outline Drawings

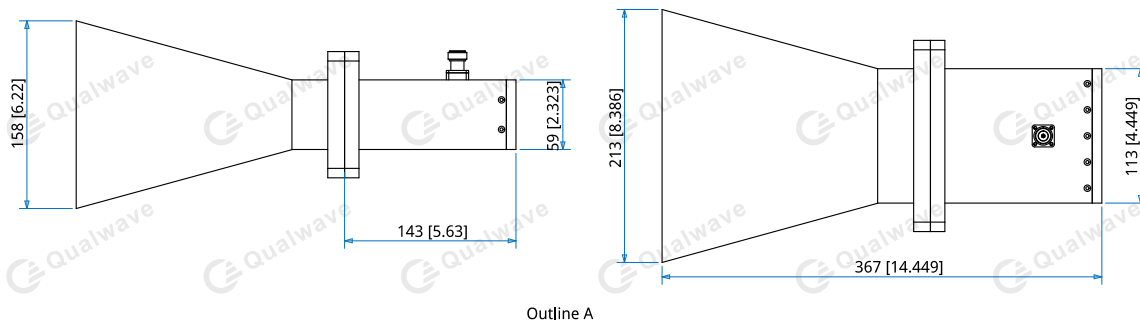

Outline A

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]

How To Order

QRHA430-X-Y-Z

X: Gain in dB

10dB - Outline A

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

N - N Female (Outline A)

Panel Mount naming rules:

P - Panel Mount

Examples:

To order an antenna, 1.7~2.6GHz, 10dB, WR-430, N Female, specify QRHA430-10-N.

Customization is available upon request.