

QVA-2000-4000-64-S

2~4GHz, 0~64dB

Features:

- * Broadband
- * High Dynamic Range

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	2~4GHz
Insertion Loss:	1.5dB max.
Attenuation Flatness:	±2dB max.
Attenuation Range:	0~64dB
VSWR:	1.5 max.
Voltage:	0~10V DC
Current:	40mA max.
Power:	1W max.
Impedance:	50Ω

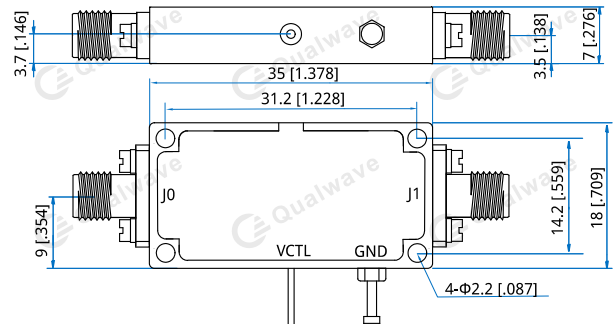
Mechanical

Size ^{*1} :	35*18*7mm
	1.378*0.709*0.276in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QVA-2000-4000-64-S

Customization is available upon request.