

QVPS360-2000-4000

2~4GHz, 360°

Features:

- * Low Insertion Loss
- * High Reliable

Applications:

- * Laboratory Test
- * Transmitter
- * Instrumentation
- * Wireless

Electrical

Frequency:	2~4GHz
Phase Range:	360° typ.
Insertion Loss:	8dB typ.
Phase Flatness:	±30° typ.
Control Voltage:	0~14V DC
Current:	5mA typ
VSWR:	2.0 typ.
Input Power:	25dBm max.
Impedance:	50Ω

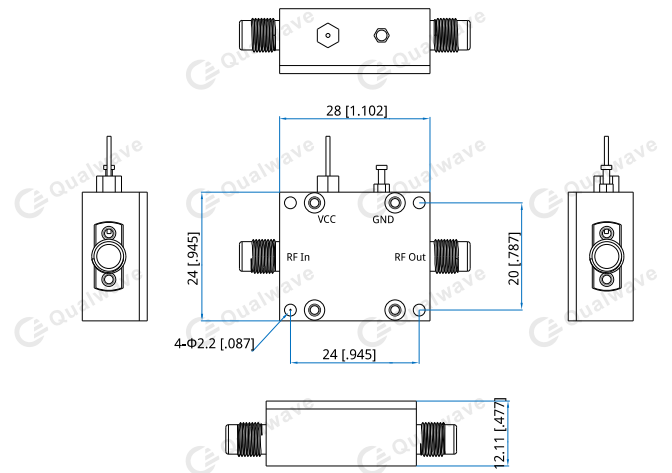
Mechanical

Size ^{*1} :	28*24*12.11mm 1.102*0.945*0.477in
RF Connectors:	SMA female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
Non-operating Temperature:	-55~+125°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

QVPS360-2000-4000

Customization is available upon request.