

QWB-10

WR-10

Features:
 * Low VSWR
 * High Isolation

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: 73.8~110GHz
 VSWR: 1.15 max.

Mechanical

Interface: WR-10 (BJ900)
 Flange: UG387/UM (FUGP900)
 Material: Copper
 Coating: Gold Plated

How To Order

QWB-10-U-W-X-Y-Z

U: Angle:
 90 - 90°
 W: H plane: H, E plane: E.
 X: Material
 Y: Flange type
 Z: Serial number if different sizes

Bending Side:

H - H plane (Outline A)
 E - E plane (Outline B)

Material naming rules:

C - Copper (Outline A, B)

Flange naming rules:

12 - UG-387/UM (Outline A, B)

Serial number naming rules:


01 - (Outline A, B)

Examples:

To order a waveguide Bends, WR-10, 90°, H plane, Copper, UG-387/UM, 30*30mm, specify QWB-10-90-H-C-12-01.

Customization is available upon request.

Outline Drawings

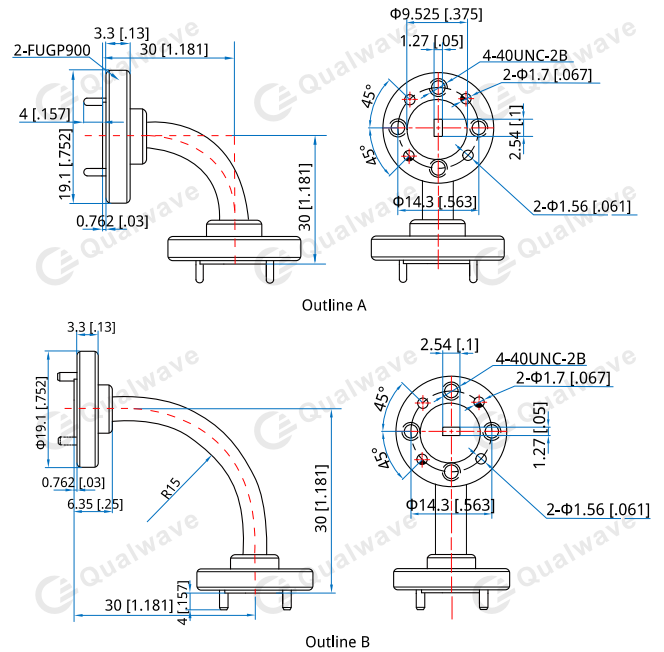

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]