

QWFA22-10 WR-22, 10W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency:	32.9–50.1GHz
VSWR:	1.2 max.
Attenuation:	10±1dB
Average Power:	10W

Mechanical

Connectors:	WR-22 (BJ400)
Flange:	FUGP400
Material:	Aluminium
Finish:	Conductive oxidation
Coating:	Gray plated

Outline Drawings

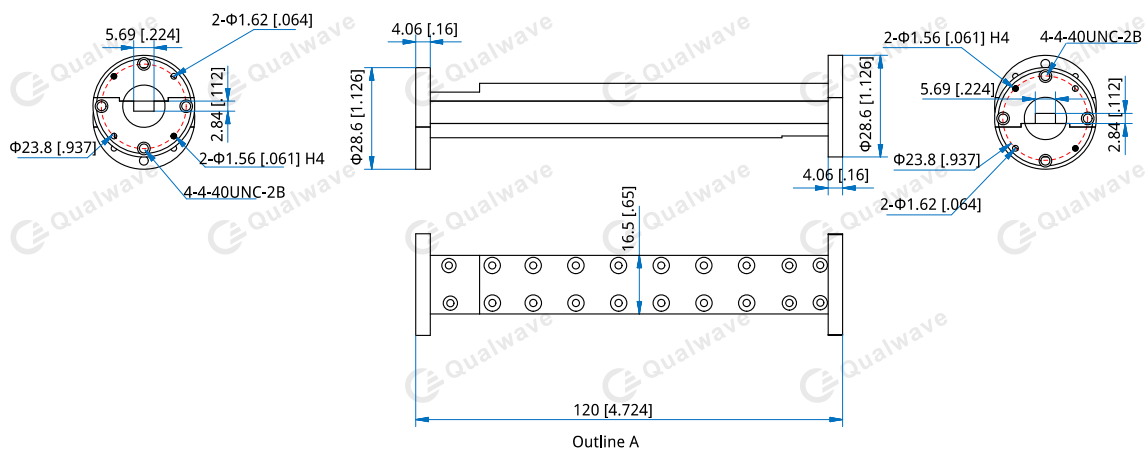

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

QWFA22-10-X-Y-Z

X: Attenuation in dB (10 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

5 - FUGP400 (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 32.9–50.1GHz, 10dB, Aluminium, FUGP400, specify QWFA22-10-10-A-5.

Customization is available upon request.