

QWFA51-K26 WR-51

Features:
 * Low VSWR
 * High Attenuation Flatness

Applications:
 * Wireless
 * Transmitter
 * Laboratory Test
 * Radar

Electrical

Frequency: 15~22GHz
 VSWR: 1.15 max.
 Attenuation: 30dB
 Power: 260W min.


Mechanical

Interface: WR-51 (BJ180)
 Flange: FBP180(UBR180)
 Material: Aluminum
 Finish: Conductive oxidation
 Coating: Black paint

Environmental

Operating Temperature: -40~+125°C

Outline Drawings

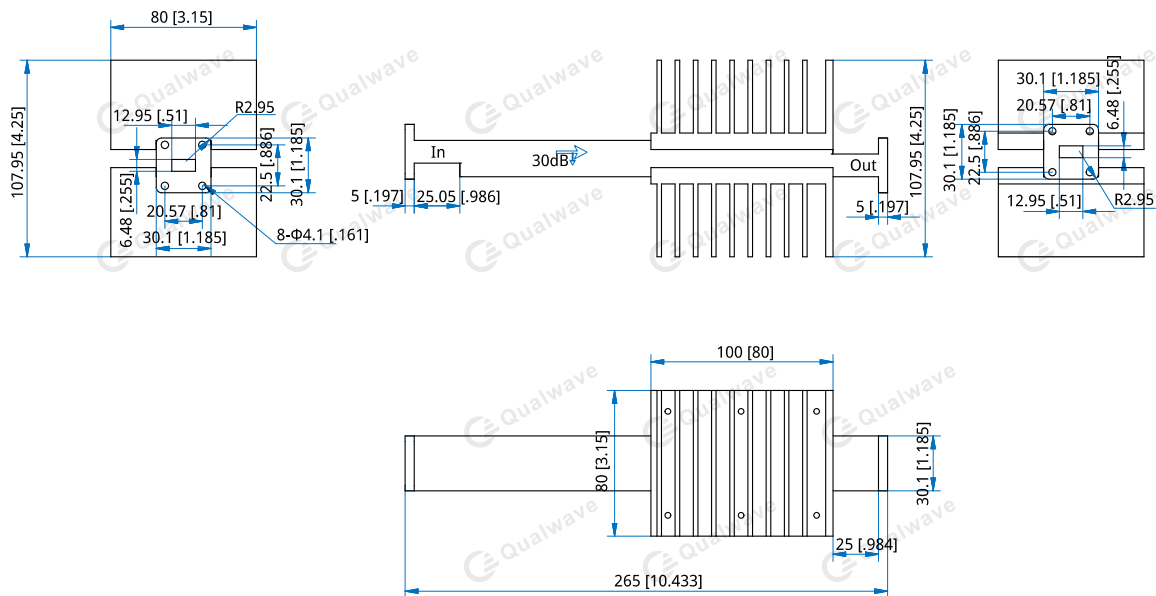

Unit: mm [in] Tolerance: ±0.5mm [±0.02in]

How To Order

QWFA51-K26-X-Y-Z

X: Attenuation in dB (30 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

1 - FBP (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 15~22GHz, 30dB, Aluminium, FBP180, specify QWFA51-K26-30-A-1.

Customization is available upon request.