

QWFA90-25 WR-90, 25W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

| | |
|----------------|-------------|
| Frequency: | 8.2~12.4GHz |
| VSWR: | 1.2 max. |
| Attenuation: | 40±1dB |
| Average Power: | 25W |
| Peak Power: | 110KW |

Mechanical

| | |
|-------------|----------------------|
| Connectors: | WR-90 (BJ100) |
| Flange: | FBP100 |
| Material: | Aluminium |
| Finish: | Conductive oxidation |
| Coating: | Gray plated |

Outline Drawings

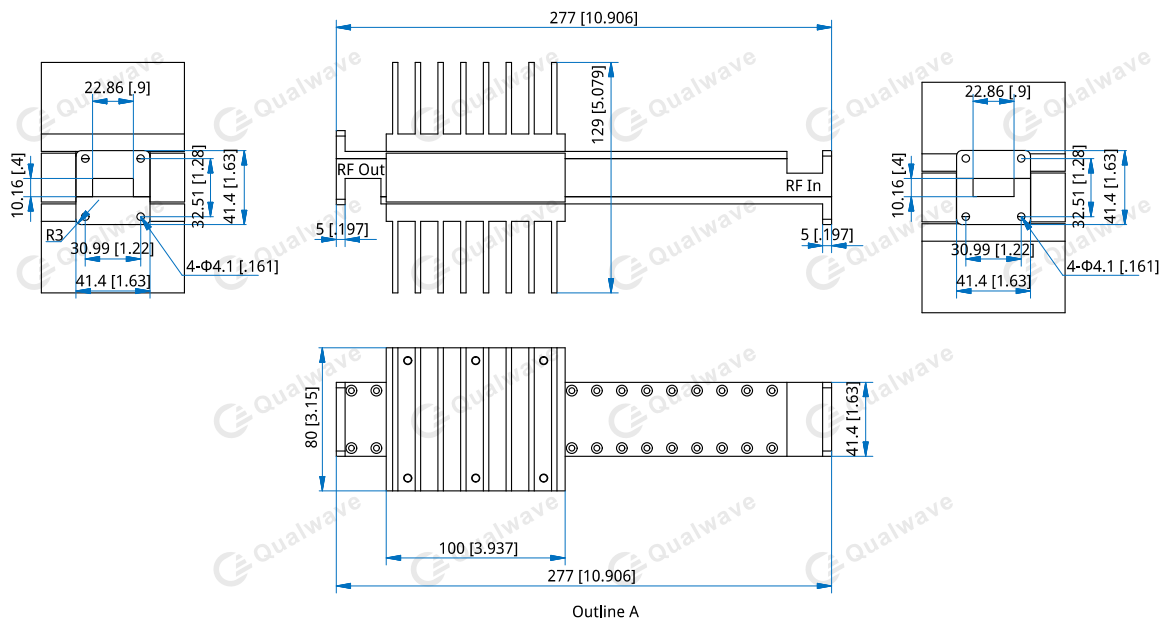

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QWFA90-25-X-Y-Z

X: Attenuation in dB (40 - Outline A)

Y: Material

Z: Flange type

Material naming rules:

A - Aluminium (Outline A)

Flange naming rules:

1 - FBP100 (Outline A)

Examples:

To order a Waveguide Fixed Attenuator, 8.2~12.4GHz, 40dB, Aluminium, FBP100, specify QWFA90-25-40-A-1.

Customization is available upon request.