

QWSS-34 WR-34

Features:
* Low VSWR
* High Isolation

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 21.7~33GHz
VSWR: 1.08 max.
Insertion Loss: 0.1 max.

Mechanical

Length: 0.03m
1.181in
Waveguide size: WR-34 (BJ260)
Flange: FBP260
Material: Aluminum Alloy

How To Order

QWSS-34-X-Y-Z

X: Length
Y: Material
Z: Flange type

Length in mm:
30 - 30mm (Outline A, B)

Material naming rules:
A - Aluminum (Outline A, B)

Flange naming rules:
1 - FBP (Outline A, B)


01- Outline A
02- Outline B

Examples:

To order a waveguide straight section, WR-34, 30mm, Aluminum, FBP260, Outline A, specify QWSS-34-30-A-1-01.

Customization is available upon request.

Outline Drawings

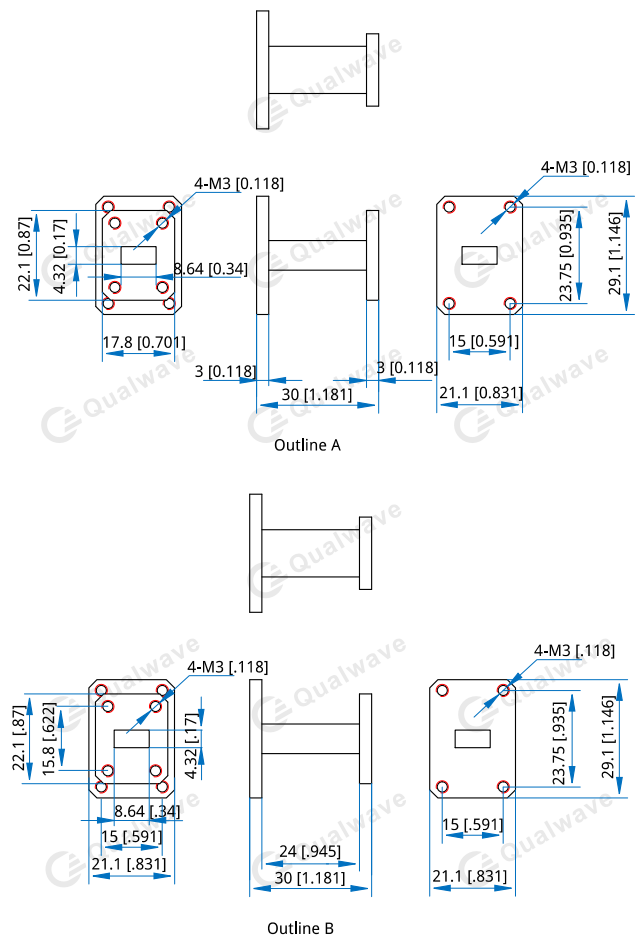

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]