

# QMWSD-D84

DPDT, 0.8~2GHz, WRD-84

**Features:**

- \* Low VSWR
- \* High Isolation
- \* Low Insertion Loss

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

|                 |             |
|-----------------|-------------|
| Frequency:      | 0.8~2GHz    |
| Insertion Loss: | 0.25dB max. |
| VSWR:           | 1.2 max.    |
| Isolation:      | 50dB min.   |

**Mechanical**

|                 |  |
|-----------------|--|
| Interface:      | WRD-84   |
| Flange:         | FPWRD84  |
| Switching Time: | Manual switching (within approximately one second) |

**Environmental**


|                            |           |
|----------------------------|-----------|
| Operating Temperature:     | -40~+85°C |
| Non-operating temperature: | -50~+80°C |

**How To Order**

**QMWSD-D84**

Customization is available upon request.

**Outline Drawings**

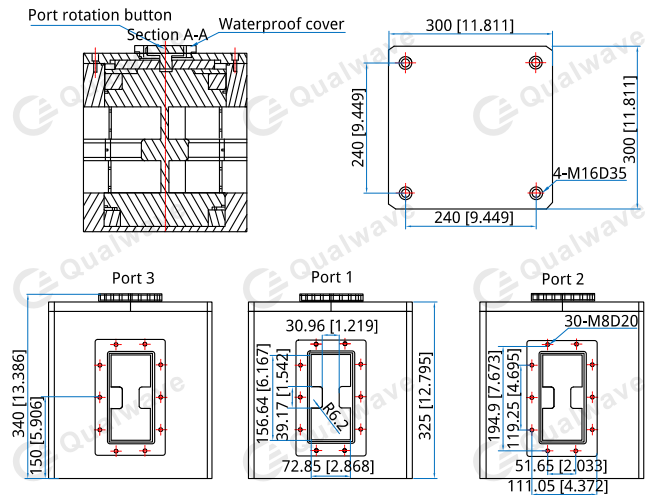

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

**Driving Schematic Diagram**

