

QWCA-229-SF-R

WR-229 to SMA female, Right angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 3.22–4.9GHz
VSWR: 1.2 max.
Impedance: 50Ω

How To Order


QWCA-229-SF-R

Customization is available upon request.

Mechanical

Length: 70mm
2.756in
RF Connectors: SMA Female
Interface: WR-229
Flange: FDP40
Material: Aluminium

Outline Drawings

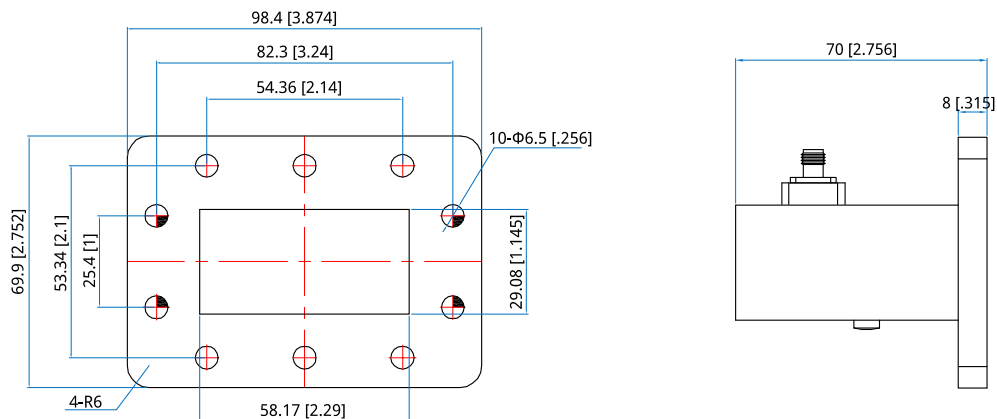

Unit: mm [in] Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]