



QWCA-229-TF-R-2-A

WR-229 to TNC Female, Right angle

Features: Applications: * Low VSWR * Wireless

* Wireless * Transmitter * Laboratory Test

* Radar

Electrical

Frequency: 3.22~4.9GHz VSWR: 1.2 max.

Mechanical


RF Connectors: TNC Female
Waveguide Size: WR-229
Flange: FDP40
Material: Copper

How To Order

QWCA-229-TF-R-2-A

Customization is available upon request.

Outline Drawings

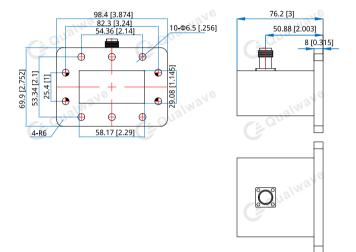

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]