Qualwave

Waveguide to Coax Adapter

QWCA-42-2F-E

WR-42 to 2.4mm Female, End Launch

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	17.6~26.7GHz
VSWR:	1.2 max.
Impedance:	50Ω

Mechanical

Length:	30mm
	1.181in
RF Connectors:	2.4mm Female
Interface:	WR-42
Flange:	FBP220
Material:	Copper

How To Order

QWCA-42-2F-E

Customization is available upon request.

Outline Drawings

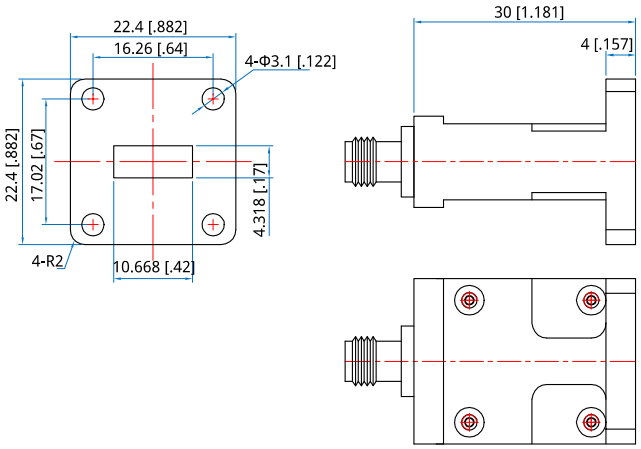

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]