

QWVA-15-B-6

WR-15, Brass, UG385/U

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	49.8~75.8GHz
VSWR:	1.3 max.
Attenuation:	0~30dB


Mechanical

Waveguide Size:	WR-15 (BJ620)
Flange:	UG385/U
Material:	Brass
Inner Cavity Coating:	Gold-Plated

Environmental

Temperature:	0~+45°C
--------------	---------

Outline Drawings

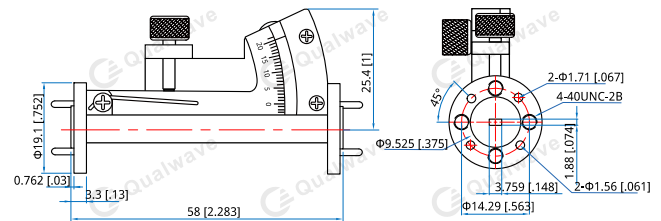

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

QWVA-15-B-6

Customization is available upon request.