

QPD16-1000-40000-20-K

16-Way, 1~40GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	1~40GHz
Insertion Loss ^{*1} :	12.7dB max.
VSWR:	1.7 max.
Isolation:	15dB min.
Amplitude Balance:	±1dB max.
Phase Balance:	±13° max.
Impedance:	50Ω
Peak Power:	3000W
Power @SUM Port ^{*2} :	20W max. as divider 2W max. as combiner

[1] Excluding theoretical loss 12dB.

[2] Rated distribution must meet the requirement of a matched load VSWR less than 1.2; rated combining: feed must satisfy the amplitude-phase balance specifications.

Mechanical


Size ^{*3} :	238*140*12.7mm 9.37*5.512*0.5in
Connectors:	2.92mm Female
Mounting:	5-Φ3.6mm through-hole

[3] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

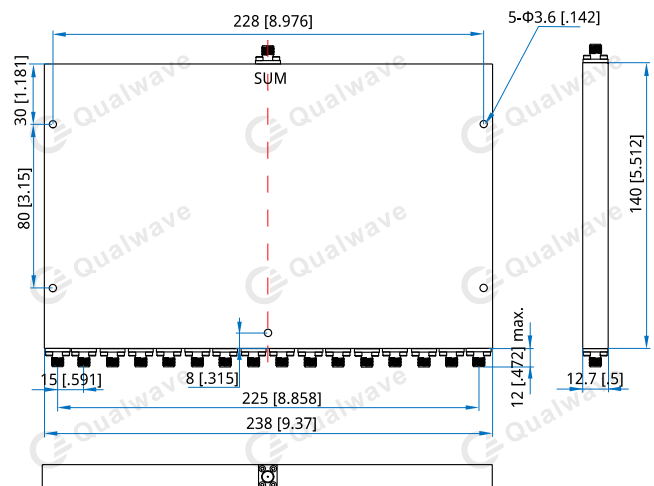

Unit: mm [in]

Tolerance: ±1mm [±0.039in]

How To Order

QPD16-1000-40000-20-K

Customization is available upon request.