

QPD16-27500-31600-10-K

16-Way, 27.5~31.6GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	27.5~31.6GHz
Insertion Loss ^{*1} :	2.8dB max.
Input VSWR:	1.6 max.
Output VSWR:	1.6 max.
Isolation:	16dB min.
Amplitude Balance:	±0.8dB
Phase Balance:	±8°
Impedance:	50Ω
Power @SUM Port:	10W max. as divider 1W max. as combiner

[1] Excluding theoretical loss 12dB.

Mechanical


Size ^{*2} :	58*208*10mm 2.283*8.189*0.394in
Connectors:	2.92mm Female
Mounting:	4-Φ3.2mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

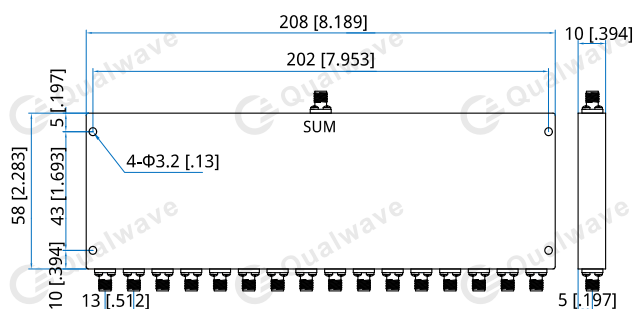

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD16-27500-31600-10-K

Customization is available upon request.