

# QPD2-2-30-2K-N

2-Way, 0.002~0.03GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

## Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

## Electrical

Frequency:	0.002-0.03GHz
Insertion Loss:	0.15dB max.
VSWR:	1.2 max.
Isolation:	30dB min.
Amplitude Balance:	±0.1dB max.
Phase Balance:	±1° max.
Power @SUM Port:	2KW max. as divider 2KW max. as combiner

## Mechanical


Size*1:	160*166*58mm 6.299*6.535*2.283in
Connectors:	N Female

[1] Exclude connectors.

## Environmental

Operation Temperature: -40~+70℃

## Outline Drawings

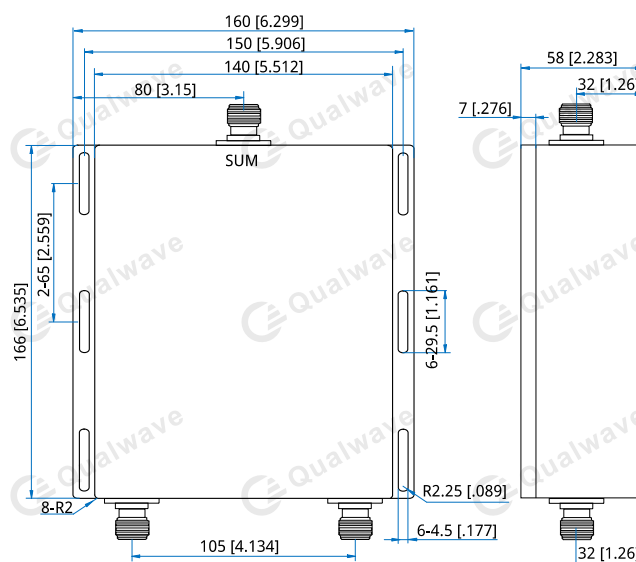

Unit: mm [in]

Tolerance:  $\pm 0.1\text{mm}$  [ $\pm 0.004\text{in}$ ]

## How To Order

**QPD2-2-30-2K-N**

Customization is available upon request.