

# QPD2-20-520-K2-N

## 2-Way, 0.02~0.52GHz, 200W

Features:  
 \* Small Size  
 \* Low Insertion Loss

Applications:  
 \* Amplifiers  
 \* Mixers  
 \* Antennas  
 \* Laboratory Test

### Electrical

Frequency:	0.02~0.52GHz
Insertion Loss:	0.35dB max.
VSWR:	1.30 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	±5° max.
Impedance:	50Ω
Power @SUM Port:	200W max. as divider 200W max. as combiner

### Mechanical

Size <sup>*1</sup> :	84*68*26mm 3.307*2.677*1.024in
Connectors:	N Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

### Environmental


Operation Temperature:	-55~+75°C
Storage Temperature:	-60~+85°C

### How To Order

**QPD2-20-520-K2-N**

Customization is available upon request.

### Outline Drawings

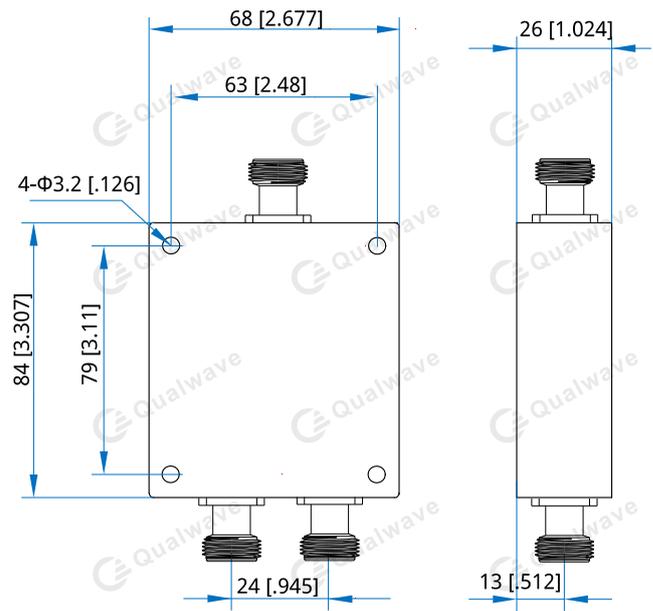

Unit: mm [in]  
 Tolerance: ±0.5mm [±0.02in]