

## QPD2-2900-3100-K2-N

### 2-Way, 2.9~3.1GHz

**Features:**

- \* Small Size
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

**Electrical**

Frequency:	2.9~3.1GHz
Insertion Loss:	0.3dB max.
VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±3°
Power @SUM Port:	200W as divider

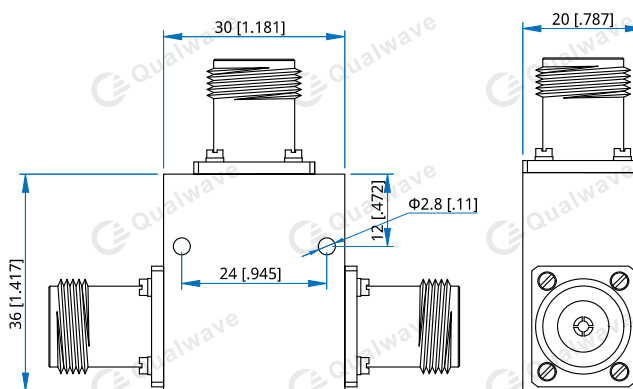
**Mechanical**

Size <sup>*1</sup> :	30*36*20mm 1.181*1.417*0.787in
Connectors:	N Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

**Environmental**

Operation Temperature:	-40~+85°C
------------------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QPD2-2900-3100-K2-N**

Customization is available upon request.