

QPD2-30-512-K2-S

2-Way, 0.03~0.512GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.03~0.512GHz
Insertion Loss:	0.5dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	20dB min.
Amplitude Balance:	0.2dB max.
Phase Balance:	5° max.
Impedance:	50Ω
Power @SUM Port:	200W max. as divider 200W max. as combiner

Mechanical

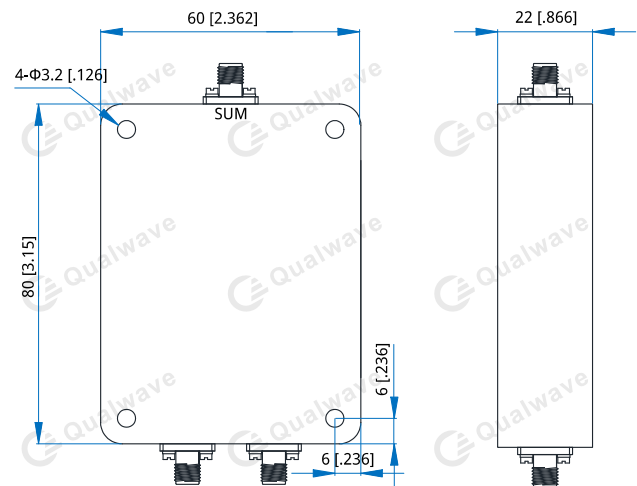
Size ^{*1} :	80*60*22mm 3.15*2.362*0.866in
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

How To Order

QPD2-30-512-K2-S

Customization is available upon request.

Outline Drawings


Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]