

QPD2-500-26500-20-S

2-Way, 0.5~26.5GHz

Features:
 * Small Size
 * Low Insertion Loss

Applications:
 * Amplifiers
 * Mixers
 * Antennas
 * Laboratory Test

Electrical

Frequency:	0.5~26.5GHz
Insertion Loss ^{*1} :	2.4dB max.
Input VSWR:	1.55 max.
Output VSWR:	1.50 max.
Isolation:	16dB min.
Amplitude Balance:	±0.4dB
Phase Balance:	±4°
Impedance:	50Ω
Power @SUM Port:	20W as divider 1W as combiner

[1] Excluding theoretical loss 3.0dB.

Mechanical


Size ^{*2} :	149*25*10mm 5.866*0.984*0.394in
Connectors:	SMA Female
Mounting:	6-Φ2.8mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

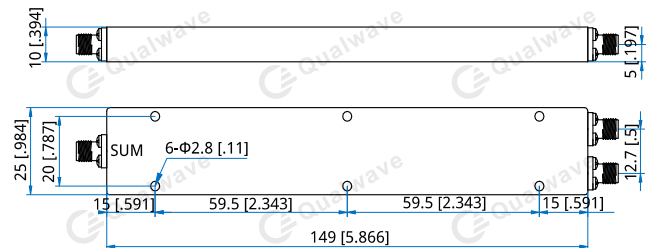

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QPD2-500-26500-20-S

Customization is available upon request.