

QPD2-6000-18000-20-S

2-Way, 6~18GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test



Electrical

Frequency:	6~18GHz
Insertion Loss:	0.8dB max.
Input VSWR:	1.4 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±2°
Impedance:	50Ω
Power @SUM Port:	20W max.as divider 1W max. as combiner

Mechanical


Size ^{*1} :	30*28*12mm 1.181*1.102*0.472in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature: -45~+85°C

Outline Drawings

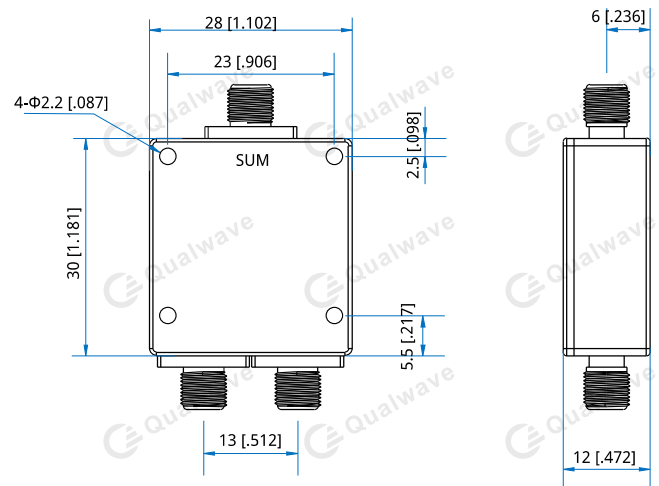

Unit: mm [in]



Tolerance: ±0.5mm [±0.02in]

How To Order

QPD2-6000-18000-20-S


Customization is available upon request.

Typical Performance Curves

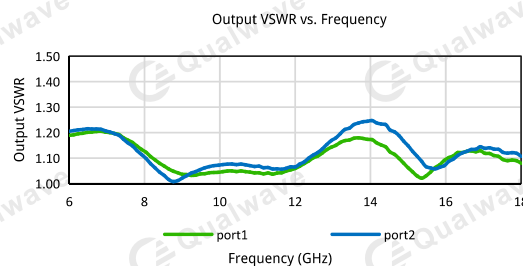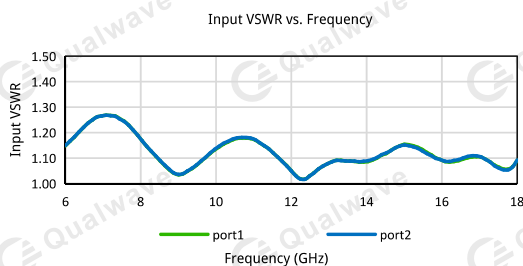


2-Way Power Divider/Combiner


Insertion Loss vs. Frequency

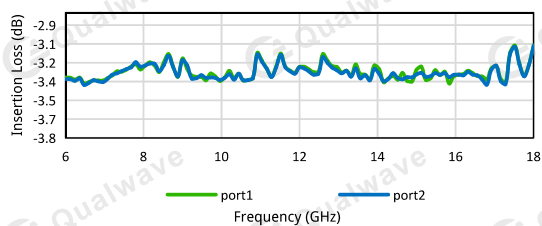

Isolation vs. Frequency

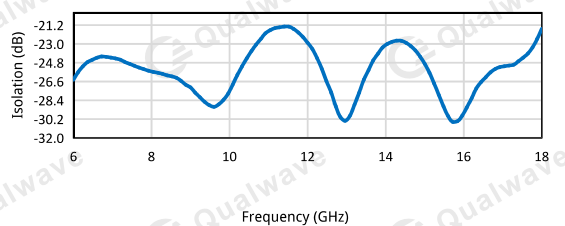

Amplitude balance vs. Frequency

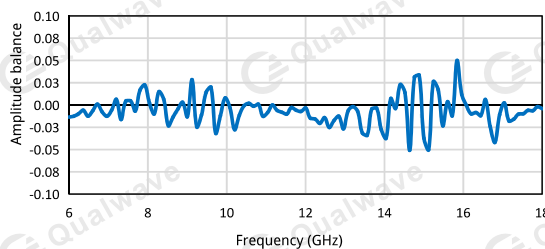

Phase balance vs. Frequency

