

QPD2-7000-9000-30


2-Way, 7~9GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

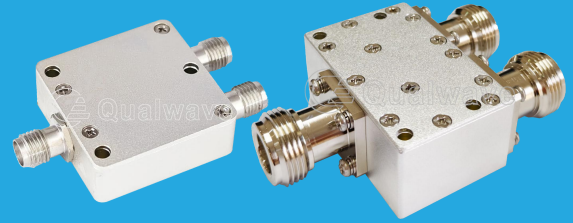

Electrical

Frequency:	7~9GHz
Insertion Loss ^{*1} :	0.4dB max. (SMA) 0.5dB max. (N)
Input VSWR:	1.25 max.
Output VSWR:	1.2 max.
Isolation:	20dB min.
Amplitude Balance:	±0.2dB
Phase Balance:	±3°
Impedance:	50Ω
Power @SUM Port:	30W max. as divider 2W max. as combiner

[1] Excluding theoretical loss 3dB.

Mechanical

Connectors ^{*2} :	SMA Female N Female
Mounting:	3-Φ2.8mm through-hole 4-Φ3.2mm through-hole

[2] Female connectors can be replaced with male connectors on request.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

How To Order

QPD2-7000-9000-30-Y

Y: Connector type

Connector naming rules:

S - SMA Female (Outline A)


N - N Female (Outline B)

Examples:

To order a 2-way power divider, 7~9GHz, 30W, SMA female, specify QPD2-7000-9000-30-S.

Customization is available upon request.

Outline Drawings

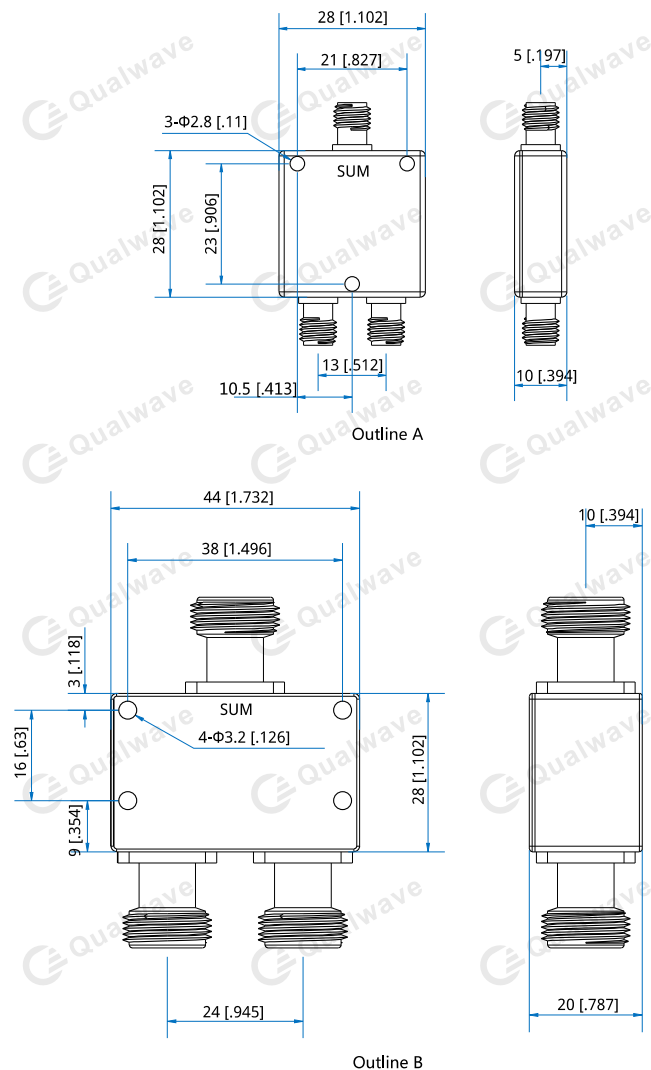

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

2-Way Power Divider/Combiner

Typical Performance Curves

