

QPD4-80-1000-20-S

4-Way, 0.08~1GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	0.08~1GHz
Insertion Loss ^{*1} :	0.9dB max.
VSWR (SUM Port):	1.35 max.
Amplitude Balance:	±0.2dB max.
Phase Balance:	±5° max.
Isolation:	12dB min.
Impedance:	50Ω
Power @SUM Port:	20W max. as divider

[1] Excluding theoretical loss 6.0dB.

Mechanical

Size ^{*2} :	100*78*30mm 3.937*3.071*1.181in
Connector:	SMA Female
Mounting:	4-Φ3.8mm through-hole


[2] Exclude connectors.

How To Order

QPD4-80-1000-20-S

Customization is available upon request.

Outline Drawings

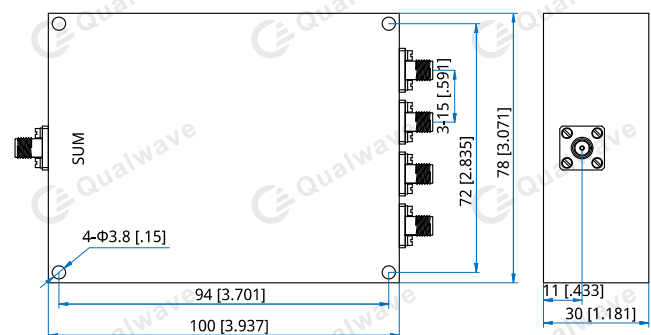

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]