

QPD5-2000-4000-20-S

5-Way, 2~4GHz

Features:

- * Small Size
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Mixers
- * Antennas
- * Laboratory Test

Electrical

Frequency:	2~4GHz
Insertion Loss ^{*1} :	0.8dB max.
Input VSWR:	1.3 max.
Output VSWR:	1.3 max.
Isolation:	18dB min.
Amplitude Balance:	±0.5dB
Phase Balance:	±5°
Impedance:	50Ω
Power @SUM Port:	20W max. as divider 1W max. as combiner

[1] Excluding theoretical loss 7.2dB.

Mechanical


Size ^{*2} :	90*76*10mm 3.543*2.992*0.394in
Weight:	180g
Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[2] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

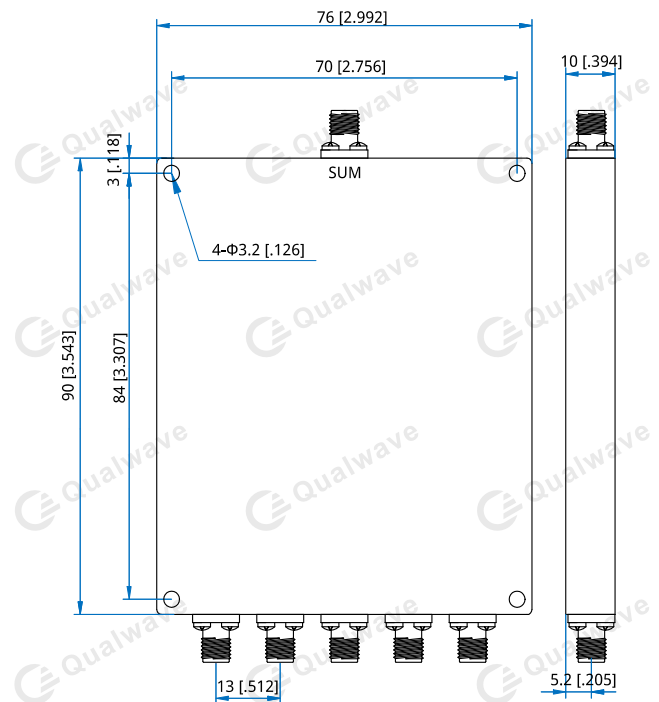

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

QPD5-2000-4000-20-S

Customization is available upon request.