

## QPD8-2000-4000-K16-S

8-Way, 2~4GHz

### Features:

- \* Small Size
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Mixers
- \* Antennas
- \* Laboratory Test

### Electrical


Frequency:	2~4GHz
Insertion Loss:	0.9dB max.
VSWR:	1.5 max.
Isolation:	18dB min.
Amplitude Balance:	$\pm 0.3$ dB max.
Phase Balance:	$\pm 5^\circ$ max.
Impedance:	50 $\Omega$
Power @SUM Port:	160W as divider

### Mechanical

Size <sup>*1</sup> :	124*88*10mm 4.882*3.465*0.394in
Connectors:	SMA Female
Mounting:	4- $\Phi 3.5$ mm through-hole

[1] Exclude connectors.

### Outline Drawings

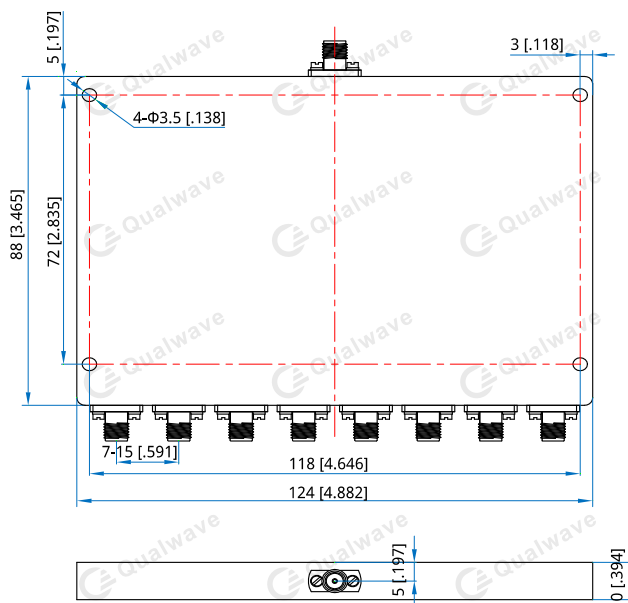

Unit: mm [in]

Tolerance:  $\pm 0.3$ mm [ $\pm 0.012$ in]

### How To Order

**QPD8-2000-4000-K16-S**

Customization is available upon request.