

# QHC9-150-250-K25-N

## 0.15~0.25GHz, 250W

**Features:**

- \* Broadband
- \* High Power
- \* Low Insertion Loss

**Applications:**

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

Frequency:	0.15~0.25GHz
Insertion Loss:	0.25dB max.
VSWR:	1.25 max.
Isolation:	20dB min.
Amplitude Balance:	±0.5dB max.
Phase Balance:	±2° max.
Average Power:	250W
Impedance:	50Ω

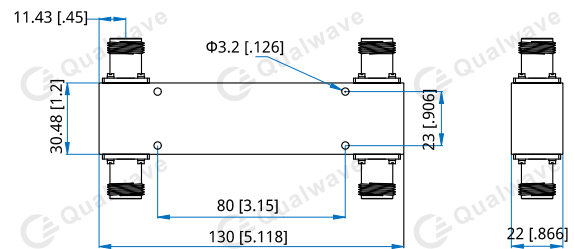
**Mechanical**

Size <sup>*1</sup> :	130*30.48*22mm 5.118*1.2*0.866in
RF Connectors:	N Female
Mounting:	4-Φ3.2mm through hole

[1] Exclude connectors.

**Environmental**

Temperature:	-45~+85°C
--------------	-----------

**Outline Drawings**


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

**How To Order**

**QHC9-150-250-K25-N**

Customization is available upon request.