QHC9-500-3000-30-S

0.5~3GHz, 30W

Features:
* Broadband
* High Power
* Low Insertion Loss

Applications:
* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.5~3GHz
Insertion Loss:	1.1dB max.
Isolation:	20dB min.
VSWR:	1.3 max.
Amplitude Balance:	±0.9dB max.
Phase Balance:	±7° max.
Average Power:	30W

Mechanical

Size[*1]:	153*25.4*11mm
	6.024*1*.433in
RF Connectors:	SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70℃
Non-operating Temperature:	-40~+80℃

Outline Drawings

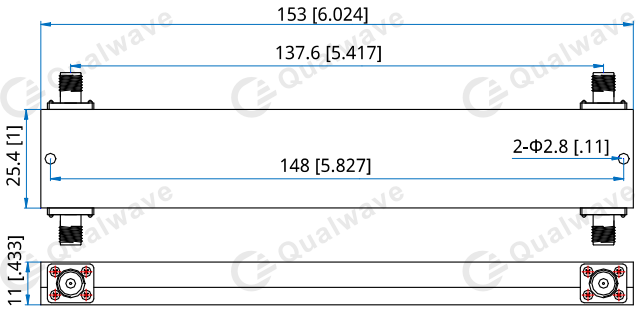

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

QHC9-500-3000-30-S

Customization is available upon request.