

QHC9-6000-18000-50-S-1

6~18GHz, 50W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6~18GHz
Insertion Loss:	1.4dB max.
VSWR:	1.6 max.
Isolation:	15dB min.
Amplitude Balance:	±0.7dB max.
Phase Balance:	±8° max.
Average Power:	50W CW
Impedance:	50Ω

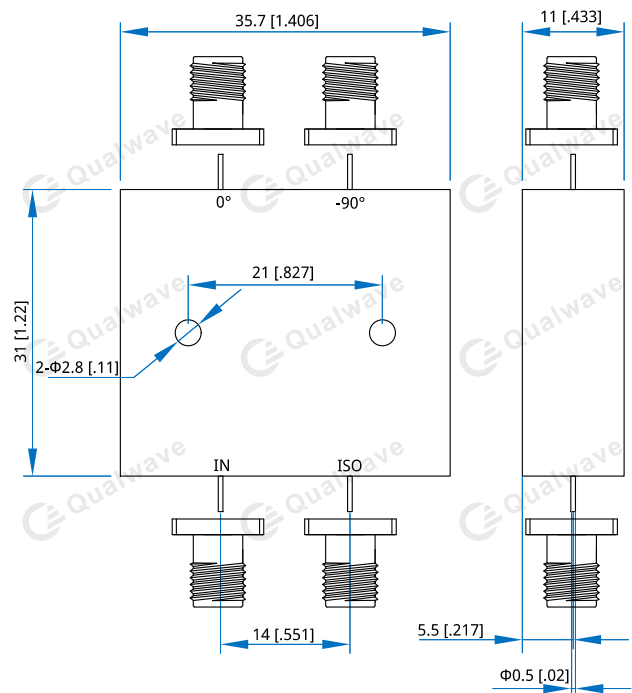
Mechanical

Size*1:	35.7*31*11mm 1.406*1.22*0.433in
Connectors:	SMA Female (Removable, with Φ0.5mm pin)
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

QHC9-6000-18000-50-S-1

Customization is available upon request.