

QHC9-800-2000-20-S

0.8~2GHz, 20W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.8~2GHz
Insertion Loss:	0.6dB max.
VSWR:	1.4 max.
Isolation:	17dB min.
Amplitude Balance:	±0.4dB max.
Phase Balance:	±5° max.
Average Power:	20W
Impedance:	50Ω

Mechanical

Size ^{*1} :	100*60*13mm 3.937*2.362*0.512in
RF Connectors:	SMA Female
Mounting:	4-Φ2.8mm through hole

[1] Exclude connectors.

Environmental


Operating temperature:	-55~+85°C
------------------------	-----------

How To Order

QHC9-800-2000-20-S

Customization is available upon request.

Outline Drawings

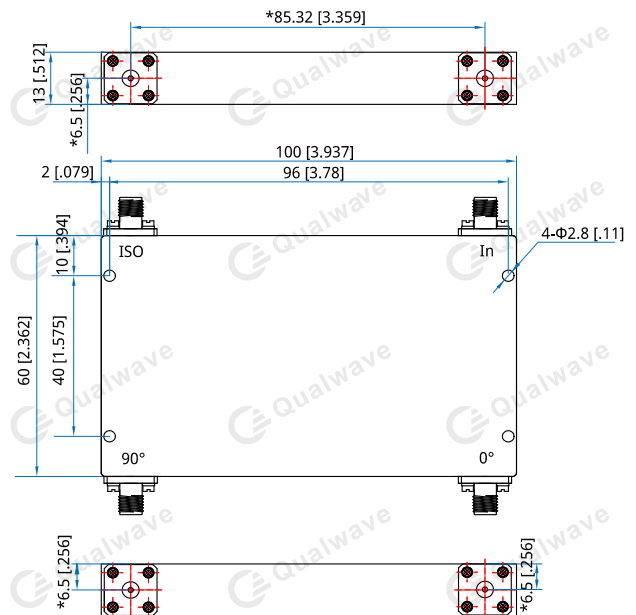

*Ensure dimensions for design.

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]