

QRF-2000-2400-60

2~2.4GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~1.87GHz 2.53~5.2GHz
Passband Insertion Loss:	1.5dB max.
Passband VSWR:	1.5 max. @0.75~1.87GHz 1.5 max. @2.53~5.2GHz 2 max. @DC~0.75GHz
Stopband:	2~2.4GHz
Stopband Attenuation:	60dB min.
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	209*43*22mm 8.228*1.693*0.866in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	+15~+30°C
--------------	-----------

Outline Drawings

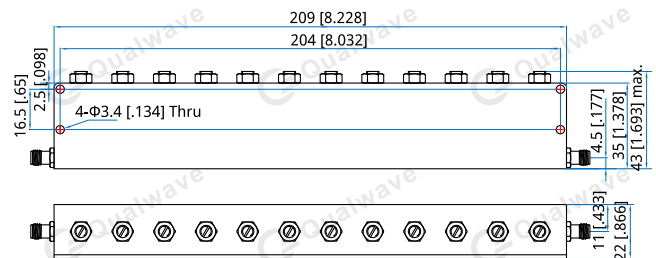

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-2000-2400-60

Customization is available upon request.