

QRF-4950-5050-60

4.95~5.05GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	DC~4.87GHz 5.13~11GHz
Passband Insertion Loss:	2dB max.
Passband VSWR:	1.6 max.
Stopband:	4.95~5.05GHz
Stopband Attenuation:	60dB min.
Average Power:	30W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	141*32*16mm 5.551*1.26*0.63in
RF Connectors:	SMA female
Mounting:	4-Φ3.4mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-10~+50°C
--------------	-----------

Outline Drawings

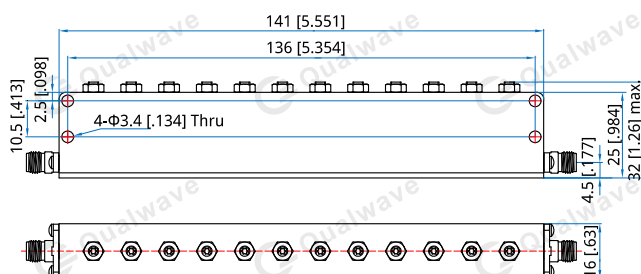

Unit: mm [in]

Tolerance: ±0.4mm [±0.016in]

How To Order

QRF-4950-5050-60S

Customization is available upon request.