

## QBT-0.5-2000

### 0.5~2000MHz

Features:  
\* Broadband  
\* Small Size

Applications:  
\* Telecom  
\* Satcom  
\* Laboratory Test  
\* Instrumentation

#### Electrical

Frequency Range:	0.5~2000MHz
Insertion Loss:	2dB max.
VSWR:	1.45 max.
Voltage:	50V max.
Current:	6.5A max.
Inductance:	47uH typ.
DC Impedance:	250mΩ typ.


#### Mechanical

Size <sup>*1</sup> :	40*50*30mm
	1.575*1.969*1.181in

Connectors:	N Female
Mounting:	4-M2.5 depth 4mm

[1] Exclude connectors.

#### Outline Drawings

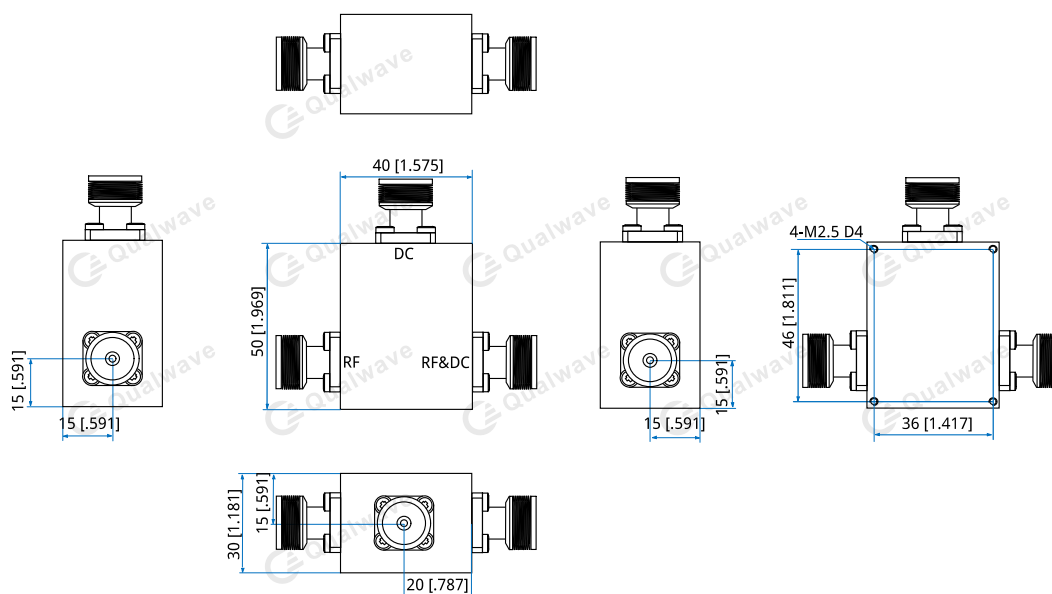

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### How To Order

**QBT-0.5-2000**

Customization is available upon request.