

# QBT-30K-67000

## 30KHz~67GHz

Features:
\* Broadband
\* Small Size

Applications:

\* Telecom

\* Satcom \* Laboratory Test

\* Instrumentation

#### **Electrical**

Frequency\*1: 30KHz~67GHz Insertion Loss 4dB max.

VSWR: 2.6 max.
DC Isolation: 30dB typ.
Voltage: 25V typ.
Current: 500mA max.
Inductance: 220uH typ.
DC Impedance: 1.2Ω typ.

[1] 16KHz~70GHz is available upon request.

#### Mechanical

Size\*2: 34\*15\*14

1.339\*0.591\*0.551in


RF Connectors: 1.85mm female

DC Connectors: SMA female

Mounting: 2-Φ2.2mm through-hole

[2] Exclude connectors.

## **Outline Drawings**

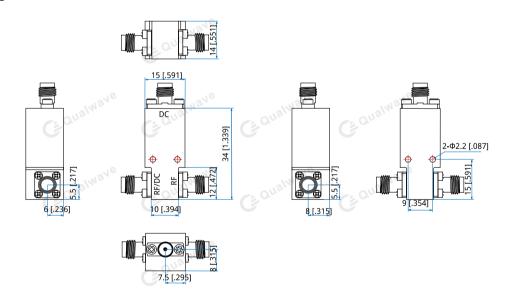

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

### **How To Order**

QBT-30K-67000

Customization is available upon request.