

QC2-MG-086-1

2.4mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~50GHz
VSWR: 1.35 max.

Mechanical


RF Connector: 2.4mm male
Mating Cable: QH280, QE086, QD086, RG316
Outer Conductor: Stainless steel
Inter Conductor: Gold plated brass

How To Order

QC2-MG-086-1

Customization is available upon request.

Outline Drawings

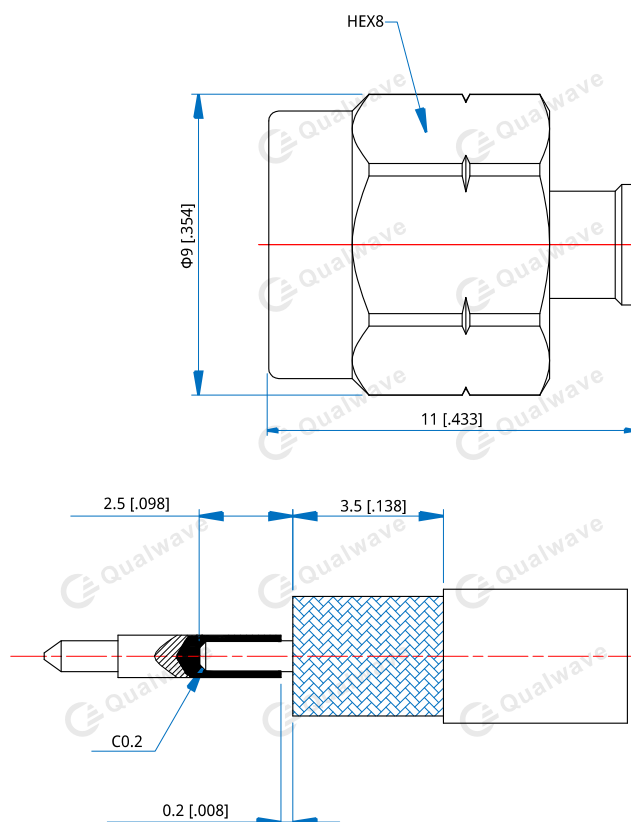

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]