

QCN-FL4B-086-2

N Female

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

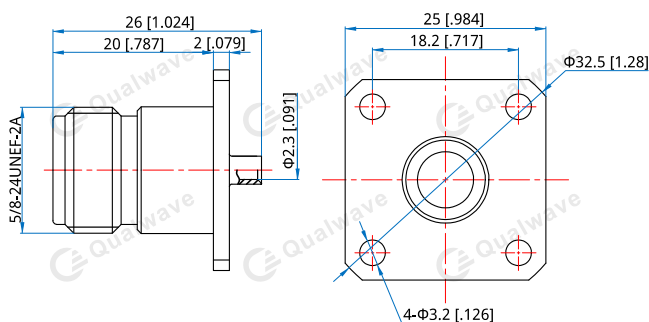
Frequency:	DC~6GHz
VSWR:	1.15 max.@6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC max.
Impedance:	50Ω

Mechanical

RF Connector:	N Female
Mating Cable:	QH280, QE086, QD086, RG316
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE, N/A
Inner Conductor:	Sliver plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
QCN-FL4B-086-2

Customization is available upon request.